# Order form - A6 track




	_													
ı	ľ	п	c	t	n	n	٦	Δ	r	М	0	ta	П	ı

Date Order number	Job reference			
Business name	Contact name			

# Order details

### Standard fixing holes

First hole as shown below and balance approx. 650mm centres (equal spacing)

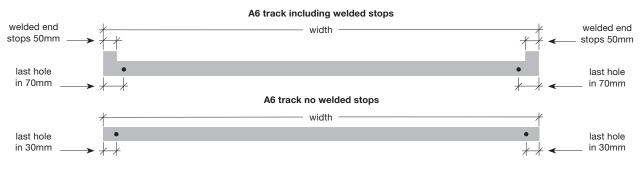

NOTE: Chrome tracks may have a slight discolouration around some fixing holes as they are used to attach the electro plating connection, this discolouration is unavoidable and not a defect.

# Track - length and hole position specification

Tue els #	Overall width	STD 650 spacing (Y/N)	From LH or RH end	Distance from end of track to centre of each hole (refer to diagram below)								
Track #	(refer above)			1	2	3	4	5	6	7	8	
1												
2												
3												
4												
5												
6												

NOTE: Zinc and powder-coat tracks longer than 6000mm will contain a splice joint. Chrome tracks longer than 2500mm will be spliced.

# Track finish Zinc Custom powder-coat Brushed satin chrome Chrome Powder-coat colour name & code 30 (no stops) or 70 (with stops)

## **Bolts & spacers**

Track length	6T2	6T3	6T4	6T5	6T6	6T7	6T8	Additional QTY
Bolts & spacers	4	6	7	9	11	13	15	

Welded end	stops	It yes, select ends	
No	Yes	LH and/or	RH