



1 jamb detail
1:5

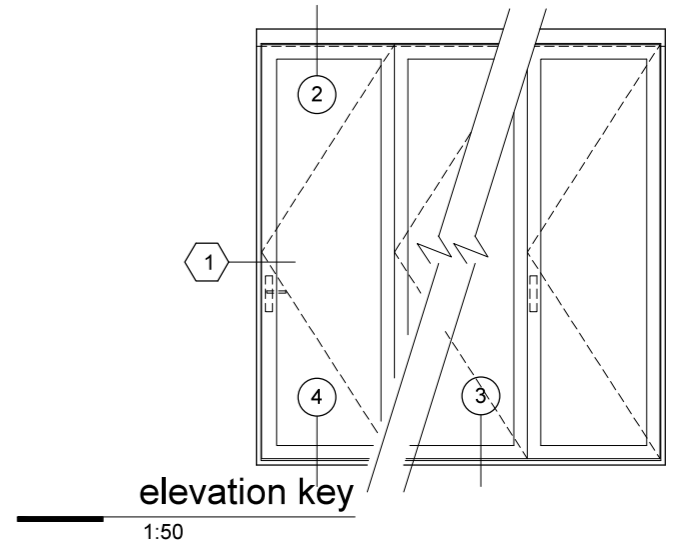


typical rough opening clearances


	head fixing	
	through carrier channel	through head bracket
head clearance	10mm	25mm
sill clearance	10mm	10mm
jamb clearance	10mm	10mm

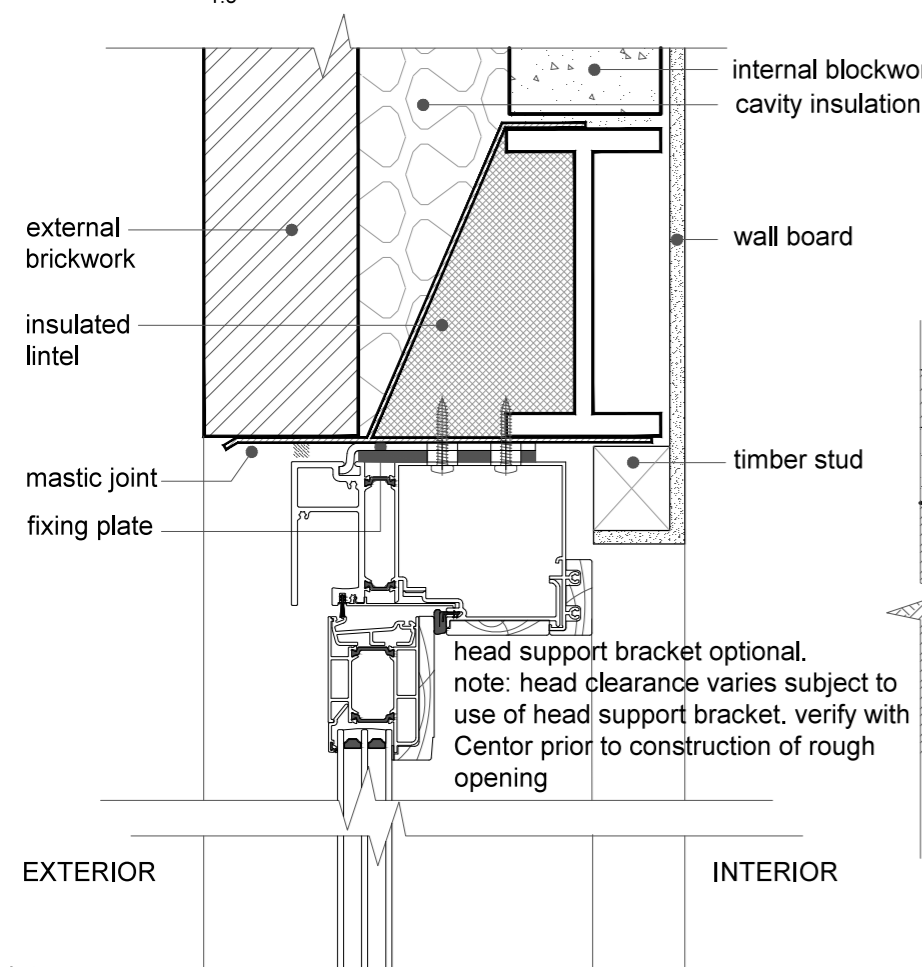

2 head detail - steel lintel
1:5

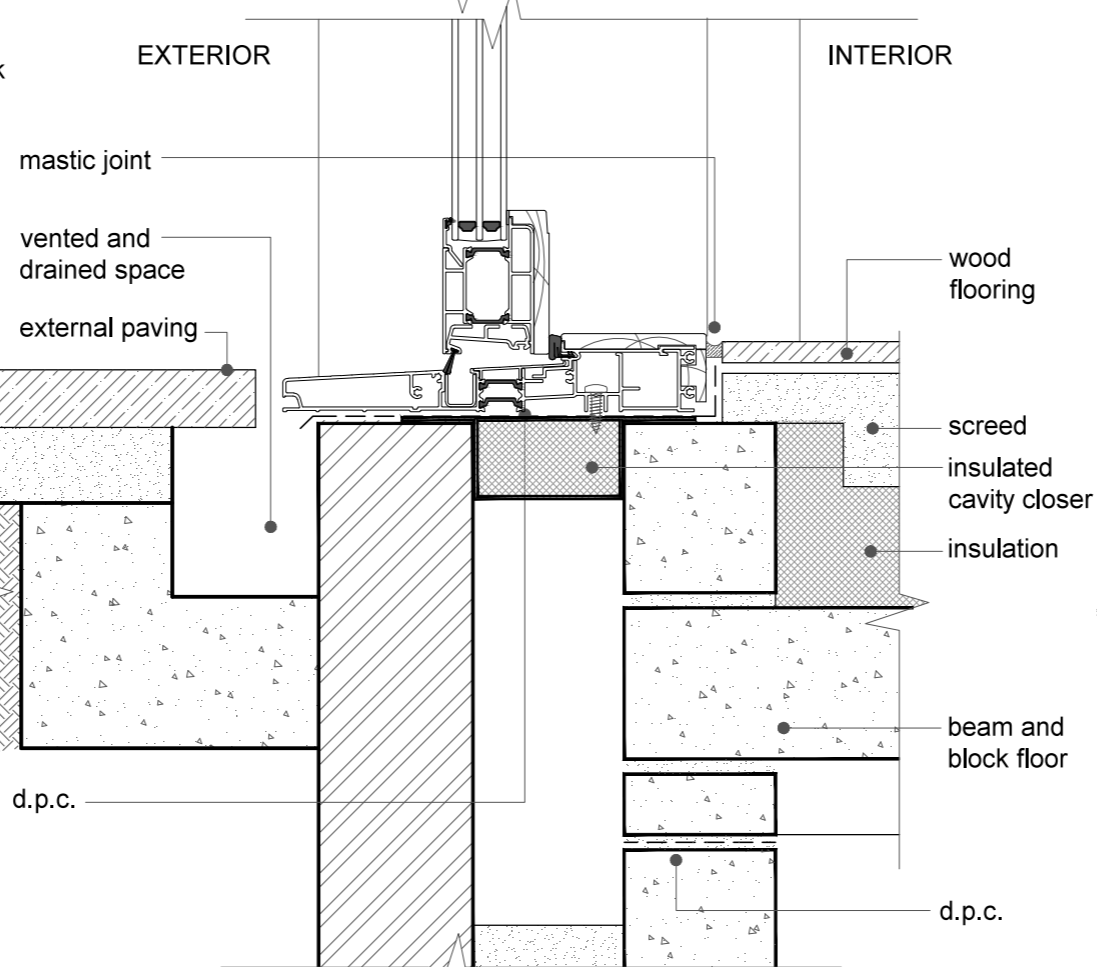

3 sill detail - level paving
1:5

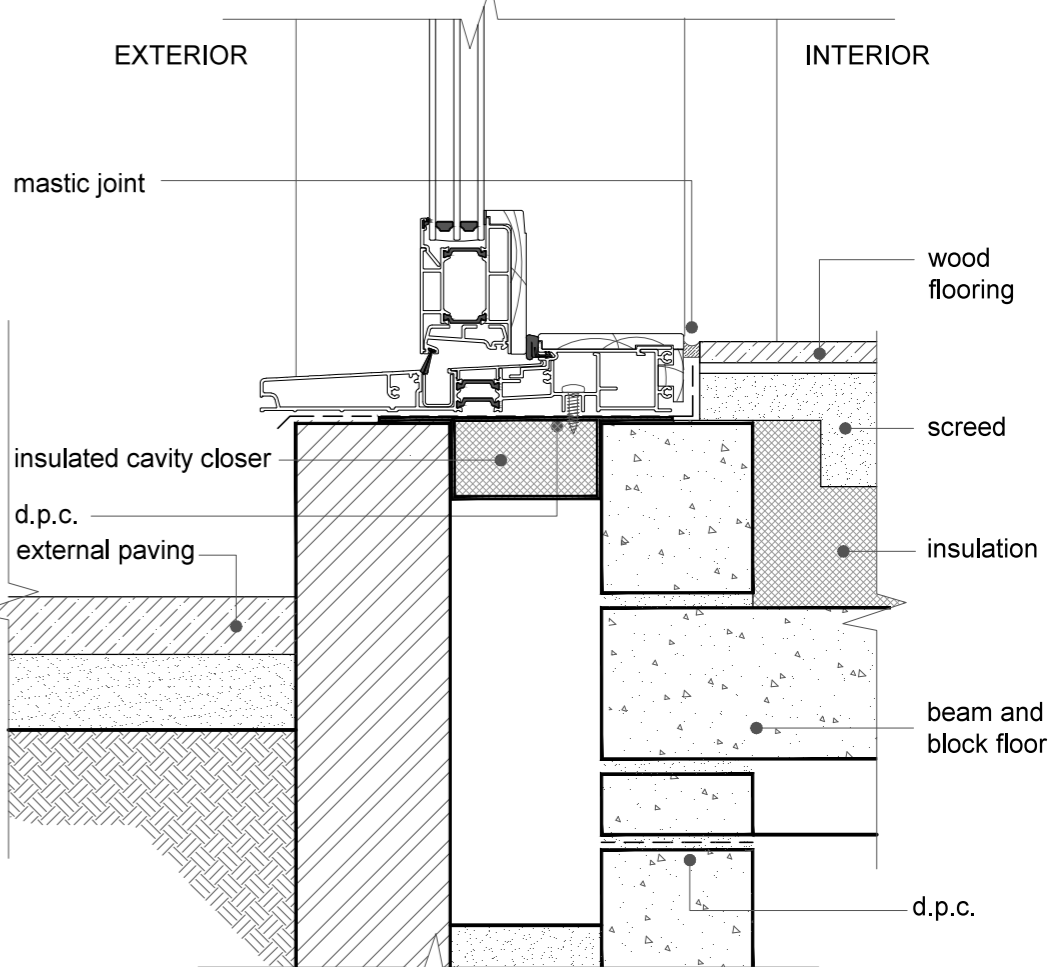

4 sill detail - step down
1:5

Structural lintels should be fabricated and installed in accordance with a certified engineer's specifications. Steel lintels are strongly recommended for openings wider than 3.6M. For further information on lintel design refer to Centor Engineering Guide.

This document is copyright and remains the property of Centor Europe Ltd.